

Wireless I/O



www.bannerengineering.co.in




BANNER[®]
more sensors, more solutions

Why Wireless?

Cable Replacement

Tank Level Monitoring Example

Standard Cable Installation

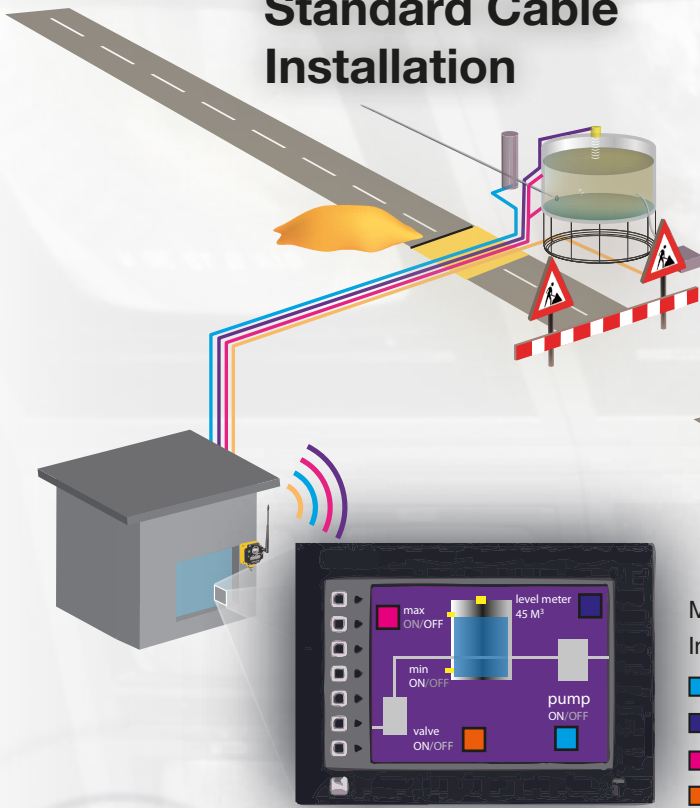


Wireless Communication

ADVANTAGES

- Compatible with all sensors
- Quick and easy installation
- Cost effective
- Perfect for renovation

Up to 48 tanks/nodes

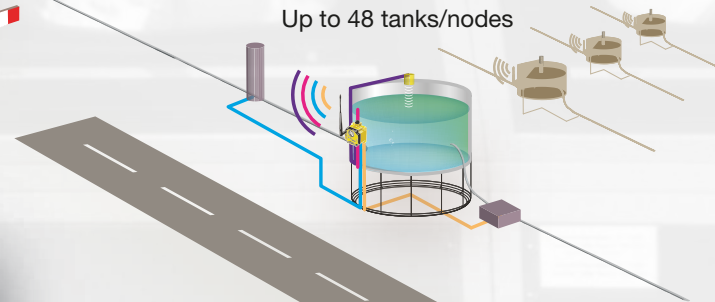

Mix of 12 I/O per tank/node
In this case:


- Pump: digital output
- Level meter: analogue input
- Max.-Min. Level: 2x digital inputs
- Valve: digital output

Key Features

Reliable



FHSS Communication



MultiHop Repeater
Network



Built-in Signal strength
for Site Survey

Secure



Proprietary Protocol




Link Loss Output
Fall Back Condition




Multiple Network ID


Flexible



Bidirectional
Communication



Configurable and
Mapped I/O




Power Possibilities

Industrial



Multiple Signals
Digital and Analogue



Robust IP67




Accessories, Antennas
and Cables

Product Topologies

DX70

Point to Point


- Direct I/O mapping
- Mixed digital and analogue I/O values
- Unlimited pairs in the same location
- 10 to 30 Vdc

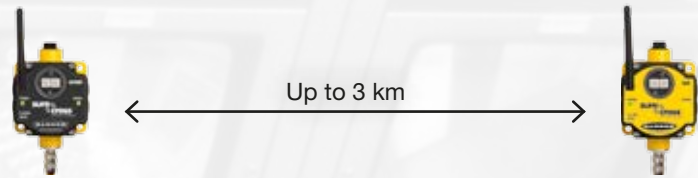

DX80

Star Topology


- Mapping I/O by software free of charge
- Digital and analogue I/O values for the Node
- Digital, analogue I/O values and communication (Modbus or Ethernet) for the Gateway
- Up to 48 Nodes per Network/Gateway
- Unlimited networks in the same location
- 10 to 30 Vdc, solar panel or battery option

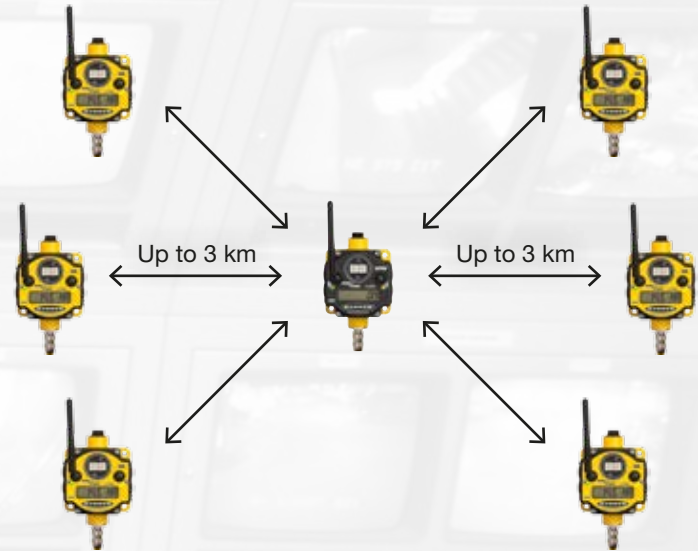

MultiHop Data Radio with I/O

Wireless Repeater Network

No limit, depends on repeaters number

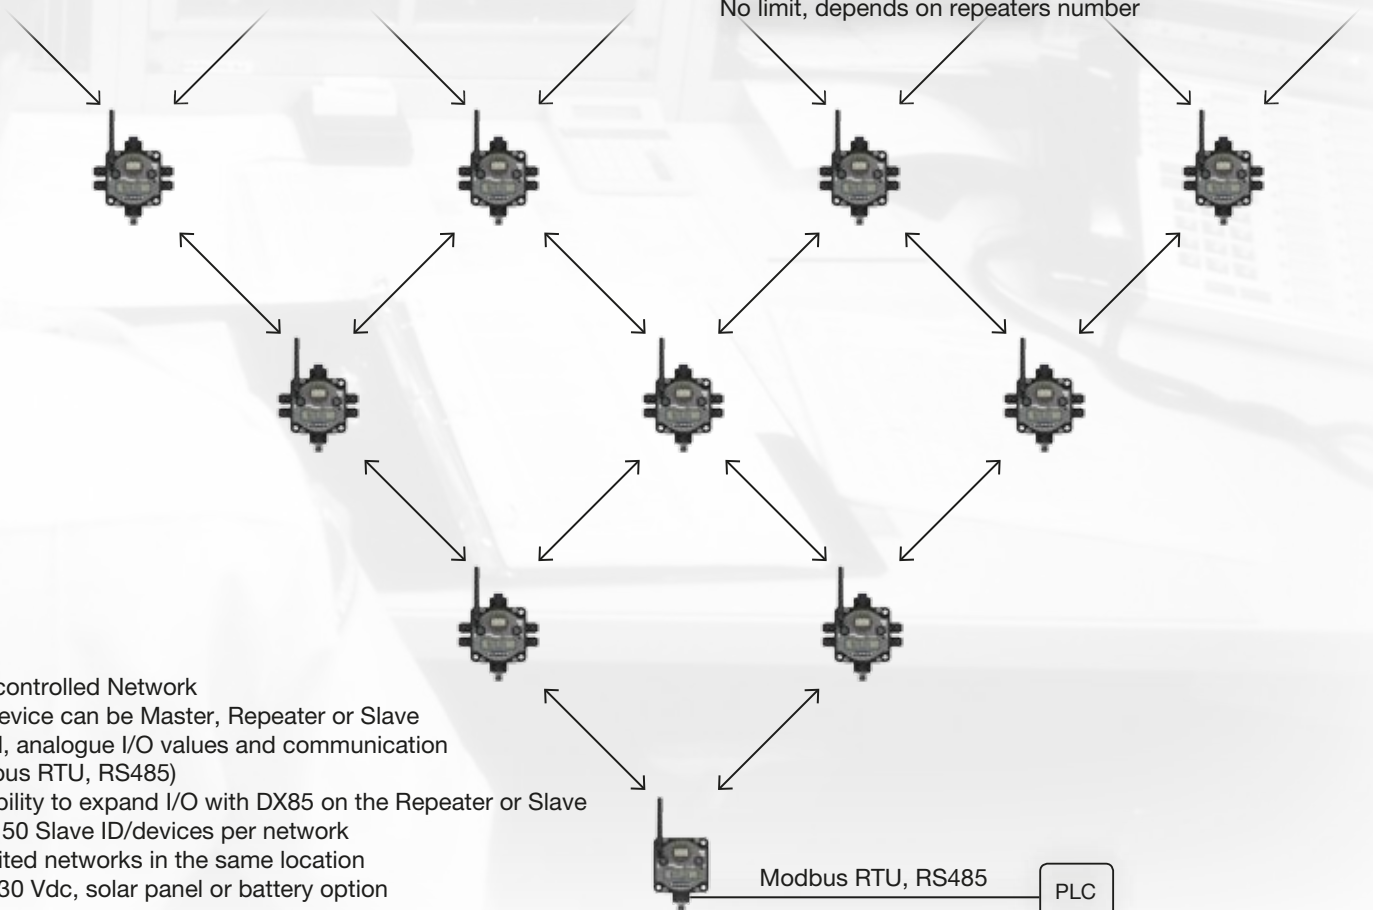

- Host controlled Network
- Any device can be Master, Repeater or Slave
- Digital, analogue I/O values and communication (Modbus RTU, RS485)
- Possibility to expand I/O with DX85 on the Repeater or Slave
- Up to 50 Slave ID/devices per network
- Unlimited networks in the same location
- 10 to 30 Vdc, solar panel or battery option

DX70

Point to Point



DX70 2,4 GHz Gateways & Nodes Kit, 10 to 30 Vdc

Mixed digital and analogue	Type	Discrete I/O (PNP)		Analogue I/O		
		IN	OUT	IN	OUT	Type
DX70G2X6S4P4M2M2	Gateway	4	4	2	2	0-20 mA
DX70N2X6S4P4M2M2	Node	4	4	2	2	0-20 mA
Digital only						
DX70G2X6S4P8	Gateway	4	8	/	/	/
DX70N2X6S8P4	Node	8	4	/	/	/

DX80

Star Topology



IP20 External Terminal block
ATEX Zone 2 certification

Internal
Antenna

Other DX80 housings available


DX80 2,4 GHz Gateways with Modbus RTU (RS485) Communication & Nodes

Gateway Model	Power option	Discrete I/O		Analogue I/O		
		IN	OUT	IN	OUT	Type
DX80G2M6S-P8	10 to 30 Vdc	12 (I+O=12 max) PNP	12 (I+O=12 max) PNP	/	/	/
DX80G2M6S-P2	10 to 30 Vdc	4 (PNP)	4 (PNP)	2	2	0-20 mA or 0-10 VDC
DX80G2M6S0P0M4M4	10 to 30 Vdc	/	/	4	4	0-20 mA
DX80G2M6S0P0V4V4	10 to 30 Vdc	/	/	4	4	0-10 VDC
DX80G2M2S-P	Flexpower	/	/	/	/	/
DX80P2T6S	10 to 30 Vdc	Gateway Pro with Modbus TCP & Ethernet IP Communication (no I/O)				

Node Model	Power Option	Discrete I/O		Analogue I/O		
		IN	OUT	IN	OUT	Type
DX80N2X2S-P7	Flexpower	12 (I+O=12 max) NPN	12 (I+O=12 max) NMOS	/	/	/
DX80N2X6S-P8	10 to 30 Vdc	12 (I+O=12 max) PNP	12 (I+O=12 max) PNP	/	/	/
DX80N2X6S-P2	10 to 30 Vdc	4 (PNP)	4 (PNP)	2	2	4-20 mA or 0-10 VDC
DX80N2X6S0P0M4M4	10 to 30 Vdc	/	/	4	4	0-20 mA
DX80N2X6S0P0V4V4	10 to 30 Vdc	/	/	4	4	0-10 VDC
DX80N2X2S2N2M2	Flexpower	2 (NPN)	2 (NMOS)	2	/	0-20 mA
DX80N2X2S2N2M4	Flexpower	2 (NPN)	2 (NMOS)	4	/	0-20 mA
DX80N2X2S-P3	Flexpower	2 (NPN)	2 (NMOS)	4	/	Thermocouple
DX80N2X2S-P4	Flexpower	/	/	4	/	PT100 (RTD) (3 wires)
DX80N2X2S4A2	Flexpower	2 (NPN-PNP)	2 (NMOS)	2	/	Frequency/counter
DX80N2X1S2A1	Internal Battery	1 (NPN-PNP)	1 (NMOS)	1	/	Frequency/counter
DX80N2X2S2S	Flexpower	2 (NPN)	2 (NMOS)	2	/	Serial Input for Flexpower sensors
DX80N2X1S1S	Internal Battery	1 (NPN)	1 (NMOS)	1	/	Serial Input for Flexpower sensors
DX80N2X2S-CS1	Flexpower Solar Panel	2 (NPN)	2 (NMOS)	2	/	0-20mA, 1 x Thermistor, 1 x Battery status

DX99

Intrinsically Safe Nodes



Solutions available for ATEX Zone 1 with 24 Vdc and Ex d enclosure

DX99 2,4 GHz Nodes for Hazardous Locations, ATEX Zone 0 & 20, compatible with DX80 Gateways out of EX Area

Model	Discrete IN (2)	Analogue IN	Power (18V boost)	Housing
DX99N2X1S2N0M2X0D2	PNP or NPN	2 x 0-20 mA	Internal Battery	Metal
DX99N2X2S2N0M2X0A2	PNP or NPN	2 x 0-20 mA	DX-81H battery box	Plastic
DX99N2X1S2N0TAX0D0	PNP or NPN	3 x Thermocouple	Internal Battery	Metal
DX99N2X1S2N0TAX0D0	PNP or NPN	3 x Thermocouple	DX-81H battery box	Plastic
DX99N2X1S2N0R4X0D0	PNP or NPN	4 x RTD/PT100	Internal Battery	Metal
DX99N2X2S2N0R4X0A0	PNP or NPN	4 x RTD/PT100	DX-81H battery box	Plastic

DATA RADIO

Data Radio MultiHop with I/O



IP20 External Terminal block housing available
ATEX Zone 2 certification



Data Radio MultiHop 2,4 GHz, each model has RS485 Modbus RTU and can be setup as a Master, Slave or Repeater					
Node Model	Power Option	Discrete I/O		Analogue I/O	
		IN (PNP)	OUT	IN	OUT
DX80DR2M-H	Flexpower	/	/	/	/
DX80DR2M-H2	10 to 30 Vdc	4 (PNP)	4 (PNP)	2 x 0-20mA	2 x 0-20mA
DX80DR2M-H3	Flexpower	2 (NPN-PNP)	2 (NMOS)	4 x Thermocouple, 1 x Thermistor	/
DX80DR2M-H4	Flexpower	/	/	4 x RTD/PT100 3-wire	/
DX80DR2M-H5	Flexpower	4 (PNP-NPN)	2 (NMOS)	4 x 0-20mA	/
DX80DR2M-H12	Flexpower	2 (NPN-PNP)	2 (NMOS)	2 x 0-20mA, 1 x Thermistor, 1 x SDI-12 or Counter and valve	/

Accessories

DX85 Extension I/O



IP20 External Terminal block housing available

DX85 Remote I/O Extension Unit (only for Gateways with Modbus RTU Communication)					
Model	Discrete I/O		Analogue I/O		
	IN (PNP)	OUT (PNP)	IN	OUT	Type
DX85M-P8	12 (I+O=12 max)	12 (I+O=12 max)	/	/	/
DX85M4P4M2M2	4	4	2	2	0-20 mA
DX85M0P0M4M4	/	/	4	4	0-20 mA

DX80 FlexSensors



FlexSensors	
Model	Description
M12FTH1Q	Serial Temp/RH sensor calibrated +/-2%
M12FTH2Q	Serial Temp/RH sensor calibrated +/-3.5%
T30UFDNCQ	T30U serial ultrasonic 3 meter range
QT50U-75390	QT50U low power ultrasonic 8 meter range
QS30WEQ	Low power emitter
QS30WRQ	Low power receiver, 15 meter range
SM312LPQD-76885	Low power mini-beam 3.6 - 5V Retro
SM312DQD-75904	Low power mini-beam 3.6 - 5V Diffuse

Power options



Power Supply, Battery Box, Solar Panel	
Model	Description
PS24DX	24V dc, 200 mA IP67 Power Supply
DX81	1 Battery
DX81P6	6 Batteries
DX81H	1 Battery for DX99 - ATEX
BWA-SOLAR-001	Solar Panel Kit

Antennas	
Model	Description
BWA-202-C RP-SMA Male	2 dBi antenna indoor
BWA-205-C RP-SMA Male	5 dBi antenna indoor
BWA-207-C RP-SMA Male	7 dBi antenna indoor
BWA-206-A N Female	6 dBi antenna outdoor
BWA-208-A N Female	8,5 dBi antenna outdoor

Surge Suppressors	
Model	Description
BWC-LMRSFRPB	Bulkhead, RP-SMA Type
BWC-LFNMN	N-Type
BWC-LFNBMN	Bulkhead, N-Type

Cables	
Model	Description
RP-SMA to RP-SMA Bulkhead (RG58 cable loss: 1,05 dB/m)	
BWC-1MRSFRSB4	4 m cable
BWC-1MRSFRSB2	2 m cable
BWC-1MRSFRSB1	1 m cable
BWC-1MRSFRSB0.2	0,2 m cable
BWA-HW-17	DX99 antenna feedthrough
RP-SMA to N Male (LMR200 cable loss: 0,56 dB/m)	
BWC-1MRSMN05	0,5 m cable
BWC-1MRSMN2	2 m cable
N Male to N Female (LMR400 coaxial, cable loss: 0,22 dB/m)	
BWC-4MNFN6	6 m cable
BWC-4MNFN15	15 m cable
BWC-4MNFN30	30 m cable
BWC-4MNFN3	3 m cable

Converter cable for the User	
Configuration Tool	
BWA-HW-006	RS-485 to USB adapter, 1 m for DX80 IP67
MQDMC-401	RS-485 to USB adapter, 0,5 m for DX80 IP20

Connectors for DX70 Top & Bottom	
1/2-inch NPT Hub Entrance	
Model	Description
BWA-QD5.5	M12 connector 5-pin
BWA-QD8.5	M12 connector 8-pin
BWA-QD12.5	M12 connector 12-pin
BWA-CG.5-10	Cable Glands (10 pieces)

Configuration tool




The User Configuration Tool uses a USB to RS-485 converter to connect a standard SureCross Gateway to a USB connection on a computer. Once connected, the User Configuration Tool will define the one to one I/O linking and setup parameters of the wireless system.



Applications by Industry

Factory Automation

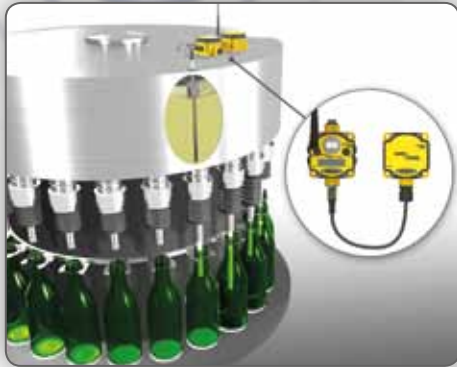

Rotating Filling Machines

Replace slip rings with on-board Wireless monitoring of level, pressure and temperature



Remote Indication

Simplify call for parts and other inventory alarms with a Wireless I/O Network



Robot equipment

Avoid costly shutdowns caused by broken cables via wireless data transfer from a moving robotic arm to the control panel

Process Automation



Tank Level Monitoring

Measure liquid level and activate a pump or open a valve with a Wireless FlexPower Node



Flow Control

Collect Flow Data with intrinsically safe Wireless Nodes that provide battery power to the radio and transmitter (ATEX)



Gas Analysis

Continuous emission monitoring of chimney output variables with a Wireless data network

Building Automation



Storage Control

Control ambient Temperature and Humidity in high value storage areas with a battery-powered Node and integrated sensor



Energy Management


A wireless monitoring system offers facilities a simple solution to increase efficiency by saving energy and conserving plant resources



HVAC Management


Control energy costs with a Wireless network that automatically controls HVAC systems based on real-time data

Environmental

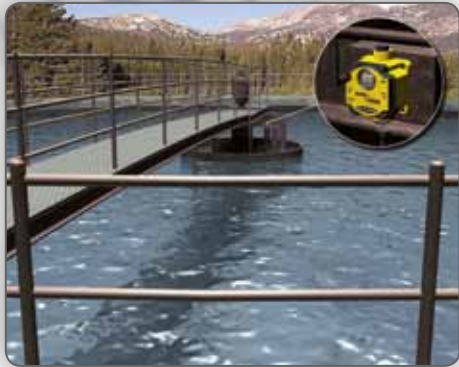

Water Treatment

Monitor multiple data points such as pH, conductivity, level and temperature with a single Wireless Node with up to 4 analog inputs

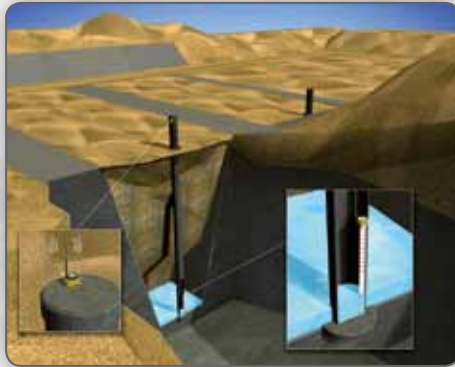

Landfill

Gather leachate levels and monitor pump status with total count of extracted volume using a single Wireless Node optimised for battery-power



Compost

Monitor internal windrow temperature to optimise compost production process with a probe including the Wireless Node and Thermocouples

Agriculture



Greenhouse

Control climate variables in a commercial greenhouse with a Wireless Temp and Humidity Node optimised for battery-power



Irrigation

Control system pressure, solenoid valve activation and counter input on a Wireless Node optimised for battery-power



Soil Moisture

Continuously monitor and control soil moisture with a Wireless Network for gathering data from the field and activating pumps in remote locations

Transportation & Logistics



Cranes

Control position and status, coordination for anti-collision of cranes with a Wireless I/O network



Manage AGV Routing

Use a Wireless Network to schedule AGV routes to improve efficiency and eliminate long wiring runs



Loading Dock Notification

Automatically alert operators that a truck has arrived at a loading dock with a Wireless M-GAGE Node embedded in the ground



Sensors

- Presence/Absence Detection
- Foreground & Background Suppression
- GO/NO GO Inspection
- Gating and Triggering
- Parts Counting
- Level and Distance Measurement
- Positioning
- Contrast and Colour Sensing




Vision

- Vision Sensors with Onboard User Interface
- Pattern Recognition
- Traceability (Barcode, Datamatrix and Text Reading)
- OCR/OCV
- Complex Part Inspection
- Part Orientation
- Assembly Verification
- Colour Inspections




Wireless I/O

- Slip Ring Replacement
- Tank Farm Monitoring
- Livestock Environmental Monitoring
- Water and Wastewater Treatment
- HVAC Remote Monitoring
- Traffic Monitoring & Control
- Remote Sensing in Process Automation
- Cable Replacement
- ATEX Approved Solutions

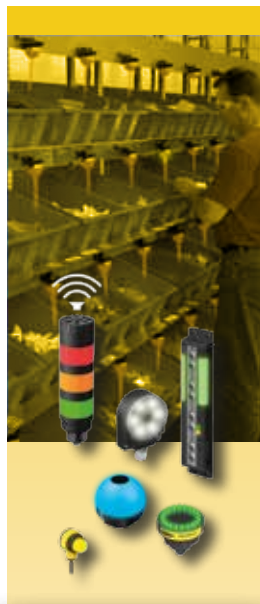

Lighting & Indicators

- Bin & Part Picking
- Error/Mistake Proofing
- Pick-to-Light & Put-to-Light
- Operator Guidance
- Call for Parts
- Incorrect Pick Signal
- Remote Start/Stop Indication
- Work lights and cabinet lighting

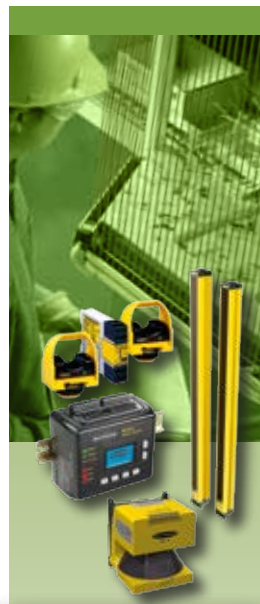

Machine Safety

- Safety Light Screens
- Optical Non-Contact Safety Systems
- Ergonomic Two-hand Control Devices
- Safety Modules
- Emergency Stop Devices
- Safety Interlocking
- Laser Scanners for Safety Applications

Banner Engineering's Worldwide Presence

Headquarters USA

Banner Engineering Corp.
9714 Tenth Avenue North
Minneapolis, Minnesota 55441
☎ +1 763 544 3164
Fax: +1 763 544 3213
sensors@bannerengineering.com
www.bannerengineering.com

Europe, Middle East, Africa

Banner Engineering Europe
Park Lane, Culliganlaan 2F
1831 Diegem
Belgium
☎ +32 (2) 4560780
Fax +32 (2) 4560789
mail@bannereurope.com
www.bannereurope.com

China

Banner Engineering Shanghai Rep Office
Rm. G/H/I, 28th Flr.,
Cross Region Plaza
No. 899, Lingling Road,
Shanghai 200030
☎ +86 21 54894500
sensors@bannerengineering.com.cn
www.bannerengineering.com.cn

Hong Kong

Banner Engineering Hong Kong
Rm. 15C, Building B, Fortune Plaza
No. 7060 ShenNan Rd, Shenzhen
☎ +86 755 83022293
www.bannerengineering.com.cn

India

Banner Engineering India - Pune (HQ)
Office No. 1001, 10th Floor
Sai Capital, Opp. ICC
Senapati Bapat Road
Pune 411016
☎ +91 20 66405624
salesindia@bannerengineering.com
www.bannerengineering.co.in

Japan

Banner Engineering Japan
Cent-Urban Building 305
3-23-15 Nishi-Nakajima
Yodogawa-Ku, Osaka 532-0011
☎ +81 6 6309 0411
mail@bannerengineering.co.jp
www.bannerengineering.co.jp

Mexico

Banner Engineering de Mexico Edificio VA0
Av. David Alfaro Siqueiros No.103
Col. Valle Oriente C.P.66269
San Pedro Garza Garcia, Nuevo Leon
☎ 52-81-8363-2714
mexico@bannerengineering.com
www.bannerengineering.com.mx

Taiwan

Banner Engineering Int'l Incorporated Taiwan Rep. Office
8F-2, No. 308, Sec. 1,
Neihu Rd. Taipei, Taiwan 114
☎ +886 2 8751 9966 #15
info@bannerengineering.com.tw
www.bannerengineering.com.tw

Banner Engineering India Pvt. Ltd.

Office No 1001, 10th Floor, Sai Capital, Opp ICC,
Senapati Bapat Road, Pune - 411016, Maharashtra
India
☎ +91 20 66405624 Fax: +91 20 66405623
salesindia@bannerengineering.com
www.bannerengineering.co.in

Banner Engineering Corp.
9714 Tenth Avenue North
Minneapolis, MN 55441
USA



Banner offers a full range of sensing solutions

BANNER ENGINEERING INDIA
WWW.BANNERENGINEERING.CO.IN

